

# UCS(LIFT)..G

zone 1	zone 2	Ex de II	II2GD	-40°C	T4 (130°C)	-20°C	T6 (80°C)
zone 21	zone 22	Ex e [ia] IIC	II2(1)GD	+80°C		+40°C	
		Ex ia IIC	II2GD			-40°C	T5 (95°C)
			IP66			+60°C	

EMERGENCY PUSH-BUTTON WITH PROTECTION STAINLESS STEEL

PULSANTE DI EMERGENZA CON PROTEZIONE ACCIAIO INOX




<b>Caratteristiche:</b>	<p>Pulsante d'allarme antincendio UCS(LIFT)...-G, GRP con protezione acciaio inox, ATEX (Exde).</p> <p><b>Modi di funzionamento da definire in sede di ordine:</b></p> <ul style="list-style-type: none"> <li>- Pulsante di emergenza premi (ritorno a molla)</li> <li>- Pulsante di emergenza con aggancio sblocco a trazione</li> <li>- Pulsante di emergenza con aggancio sblocco a rotazione</li> <li>- Pulsante di emergenza con aggancio sgancio a chiave</li> </ul>
<b>Features:</b>	<p>Fire alarm station UCS(LIFT)...-G, GRP with protection stainless steel, ATEX (Exde).</p> <p><b>Modes of operation to be defined on order:</b></p> <ul style="list-style-type: none"> <li>- Emergency push button push (spring return)</li> <li>- Stay put emergency push button pull to release</li> <li>- Stay put emergency push button rotating to release</li> <li>- Stay put emergency push button key released</li> </ul>

FUNZIONAMENTO PULSANTE EMERGENZA OPERATION EMERGENCY PUSH BUTTON	CODICE CODE
ritorno a molla spring return	LM
aggancio sblocco a trazione pull to release	LT
aggancio sblocco a rotazione rotating to release	LR
aggancio sgancio a chiave key to released	LK


Specifica tecnica - Technical specification	
<b>Materiale</b> Material	GRP glass fibre reinforced polyester
<b>Dimensioni</b> Dimension	110x110x85mm (alternative dimension 170x110x85)
<b>Colore</b> Color	Rosso (altri colori a richiesta) Red (other color on request)
<b>Imbocchi</b> Cable entries	1 gland M20 std execution on request: 1 gland M25 - 2 gland M20 or M25

### Features of the Contact 10 A Caratteristiche dei contatti 10 A


Ith = 10 A; Ui = 415 V  
**AC**  
 Ue = 380 V; Ie = 1,9 A or  
 Ue = 240 V; Ie = 3 A or  
 Ue = 120 V; Ie = 6 A  
**DC**  
 Ue = 250 V; Ie = 0,27 A or  
 Ue = 125 V; Ie = 0,55 A or  
 Ue = 24 V; Ie = 2,87 A



Contatti manuali Manual contact	
UCS(LIFT)...-21G	1 NO
UCS(LIFT)...-22G	1 NC
UCS(LIFT)...-25G	1 NC + 1 NO
UCS(LIFT)...-27G	2 NC
UCS(LIFT)...-29G	2 NO
UCS(LIFT)...-30G	1 NO + 2 NC
UCS(LIFT)...-31G	2 NO + 1 NC
UCS(LIFT)...-32G	3 NC
UCS(LIFT)...-33G	3 NO

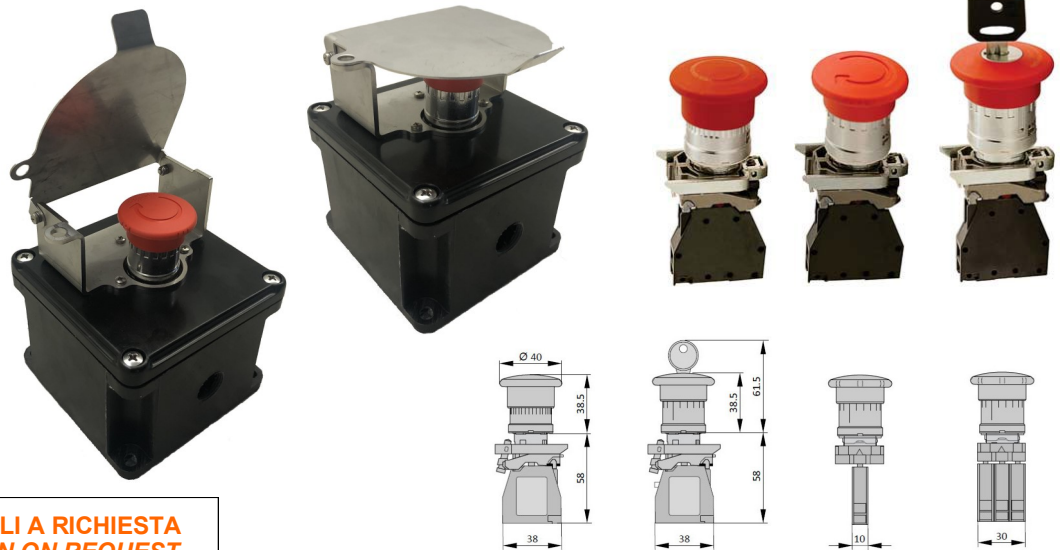

Push button with 1 contact  
 Push button with 1 rows of 3 contacts




**EOL**  
 (CBR) RESISTOR  
 (CBD) DIODE  
 SERIES or PARALLEL  
 12-240V AC/DC  
 MAX 4W (to be defined)

### ALTRE ESECUZIONI SPECIALI A RICHIESTA OTHER SPECIAL EXECUTION ON REQUEST

**ESEMPIO - EXAMPLE**  
 Dimensione alternativa (170x110x85)  
 con LED e/o EOL e/o MORSETTIERA e/o SUNSHADE  
 Alternative dimension (170x110x85)  
 with LED and/or EOL and/or TERMINAL and or SUNSHADE



LED LIGHT



SUNSHADE



EOL RESISTOR

### LED PILOT LIGHT

LED LIGHTS  
 24V to 254 V AC/DC  
 2 to 10 mA

(W) WHITE	(G) GREEN
(R) RED	(Y) YELLOW
(B) BLUE	

